




Fab Guard Connector Plus Flexible Duct Connectors are designed to protect the fabric during fabrication operations and are made for both residential and light commercial applications. The Fab Guard seam connectors have an extra fold in the seam to further protect the fabric during folding/rolling operations. They are available in vinyl fabric and are made with prime G-90 galvanized steel. The continuous 100' rolls readily dispense from a bench-high carton for handler convenience. Connector Plus offers quality unmatched by others and excels in isolating vibrations produced by air handling units, fans, blowers and other HVAC equipment.

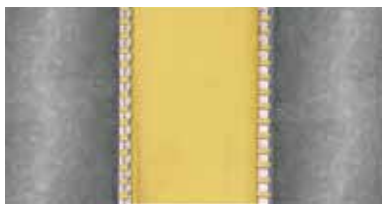

PART NUMBER	PRODUCT DESCRIPTION	QTY.
307864	CONN RSDL FAB FLT YEL 100 2-4-2 28G (FGRV-8-100)	100 ft./box
307860	CONN LT FAB FLT YEL 100 3-4-3 28G (FGLV-8-100)	100 ft./box

FEATURES AND BENEFITS

- Utilizes heavy duty G-90 galvanized steel (thicker galvanized coated steel for extended product life)
- The Fab Guard seam offers additional protection to the fabric during folding/rolling
- Offers precisely perforated double-fold seams
- Available in extra wide 4" fabric to allow more flexibility in all installations
- 4" – 3" – 4" configuration
- 2" – 4" – 2" configuration

AVAILABLE IN THE FOLLOWING FABRICS

- VINYLFLEX

SPECIFICATION/STANDARDS COMPLIANCE

Property	Method	Results
Surface Burning Characteristics of Building Materials	ASTM E84	Pass
	Los Angeles Approval RR# 8434	Pass